


D049-R D050-R
IP66 IK06 Outdoor
Commercial Downlight



GRE Lighting
R & C Agency International
Lighting Specialists for over 15 years

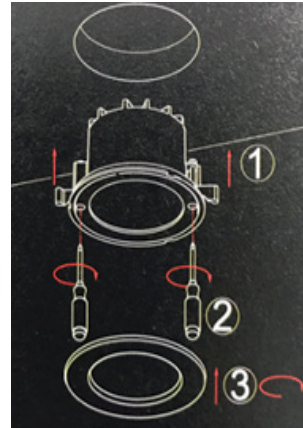

Description: Class leading, innovative high performance outdoor downlight with IP66 weatherproofing and IK06 impact resistance. Available in either 18W (2100 Lm) or 26W (2900 Lm) output. Choices of various reflectors with a deep waffle frame producing a 30° cut-off angle make this the number one choice in architectural grade external lighting. Optional honeycomb available to further reduce beam spread. Twist lock system instead of traditional spring clips allow for no visible screw aesthetic as well as quick fit-off

Material: Aluminium

Dimmable: Optional

Include Driver: Yes, non-dimmable driver enclosed in weather proof box

Optional Beam: D049-R: 10° available on request
 D050-R: 10° available on request



Item Code	Wattage	Input	Lumen Output	Beam	CCT	Fitting Colour	Size D x H	Cut Size D
D049-R	18W	500mA, 35V	2100 Lm / 2163 Lm	20°/40° / 70°	3000K / 4000K	Black / White	165 x 94 mm	150 mm
D050-R	26W	700mA, 36V	2784 Lm / 2900 Lm / 2987 Lm	20°/40° / 70°	2700K / 3000K / 4000K	Black / White	220 x 130 mm	200 mm

R&C AGENCY INTERNATIONAL

94 Wecker Road,
 Mansfield, QLD, 4122

Email: sales@rcagency.com.au
 Ph: (07) 3216 2888
 Fax: (07) 3216 2999

Opening Hour:
 8:00am to 4:30pm Monday to Friday
 *Showroom by appointment only