


**LEDDR150-1050DA  
LEDDR350-1050DA  
15 and 35w Dali Compatible Driver**



**GRE Lighting**

*R & C Agency International  
Lighting Specialists for over 15 years*

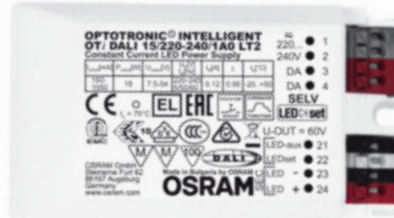

**Description:** Osram OTI DALI 15W and Osram OTI DALI 35W control gears. Available in a range of outputs ranging from 150-1050mA for the 15W, and 350-1050 for the 35W. Suitable for commercial fittings.

- Versatile DALI window driver due to flexible output characteristic
- Very high efficiency and reliability
- Protection of the system thanks to thermal management and Smart Control
- High-quality dimming of 1-100 % by amplitude dimming
- Versatile scope of application due to OSRAM DALI Technology:
- Easy to use in corridors and restrooms because of three-level Corridor function
- Touch DIM application: easy to control via pushbutton or sensor
- Energy efficient Touch DIM operation due to automatic switch-off at sufficient residual light
- Suitable for emergency installations (acc. to EN 60598-2-22 and IEC 61347-2-13, appendix J) thanks to DC detection (0 Hz, pulsating DC),

Supplied without flex and plug. In-built protections for overheat, overload and short-circuits.

**Input:** 240V  
**Dimming Interface:** DALI / Touch DIM / Touch DIM Sensor  
**Dimming Method:** Amplitude Modulation / Pulse Width Modulation

Item Code	Wattage	Output	Size L x W x H
LEDDR150-1050DA	15W	7.5-54VDC (Max. 60V). Can be set from 150-1050mA via resistor change	95 x 53 x 30 mm
LEDDR350-1050DA	35W	15-54VDC (Max. 60V). Can be set from 150-1050mA via resistor change	103 x 67 x 30 mm

**R&C AGENCY INTERNATIONAL**

94 Wecker Road,  
Mansfield, QLD, 4122

Email: sales@rcagency.com.au  
Ph: (07) 3216 2888  
Fax: (07) 3216 2999

Opening Hour:  
8:00am to 4:30pm Monday to Friday  
\*Showroom by appointment only