


## LEDSNA12 LEDSNA24 IP66 LED Snake Light



# GRE Lighting

R & C Agency International  
Lighting Specialists for over 15 years

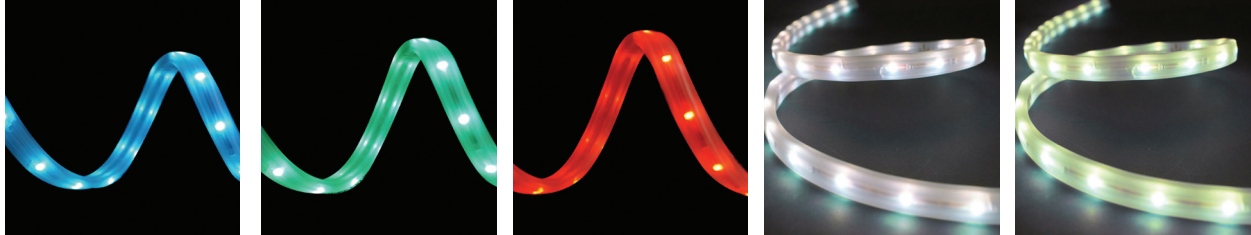

**Description:** IP66 12V or 24V LED Snake light for outdoor decorating application. Capable of single runs up to 33m (12V) or 66m (24V) with no visible voltage drop.

**Input:** 12V DC or 24V DC

**Material:** PVC

**Maximum Single Run:** 33 m (12V DC version) / 66 m (24V DC version)

**LED Per Series:** 3 LEDs per Series (12V DC version) / 6 LEDs per Series (24V DC version) / 10 LEDs per Series (LEDSNA24VREE)

**LED Spacing:** 27.3 mm (LEDSNA12BL, LEDSNA12GR, LEDSNA24BL, LEDSNA24GR, LEDSNA24REE)  
27.8 mm (LEDSNA12NATWH, LEDSNA12WWHP, LEDSNA24WH, LEDSNA24WW)



### 12V DC Snake Light

Item Code	Wattage/Metre	Lumen Output	Beam Angle	Lumen Efficiency	CCT / LED Colour	Size W x H	Cuttable Size
LEDSNA12BL	2.88W	15.6 Lm/m	120°	5.55 Lm/W	Blue	12 x 6 mm	83.4 mm
LEDSNA12GR	2.88W	71.84 Lm/m	120°	26.70 Lm/W	Green	12 x 6 mm	83.4 mm
LEDSNA12NATWH	2.88W	290 Lm/m	120°	100 Lm/W	5700K (+/- 500K)	12 x 6 mm	83.4 mm
LEDSNA12WWHPE	2.88W	260 Lm/m	120°	90.20 Lm/W	2700K (+/- 500K)	12 x 6 mm	100 mm

### 24V DC Snake Light

Item Code	Wattage/Metre	Lumen Output	Beam Angle	Lumen Efficiency	CCT / LED Colour	Size W x H	Cuttable Size
LEDSNA24BL	2.88W	15.6 Lm/m	120°	5.55 Lm/W	Blue	12 x 6 mm	166.8 mm
LEDSNA24GR	2.88W	71.84 Lm/m	120°	26.70 Lm/W	Green	12 x 6 mm	166.8 mm
LEDSNA24REE	2.88W	5.85 Lm/m	120°	3.75 Lm/W	Red	12 x 6 mm	166.8 mm
LEDSNA24WH	2.88W	290 Lm/m	120°	100 Lm/W	5700K (+/- 500K)	12 x 6 mm	166.8 mm
LEDSNA24WW	2.88W	260 Lm/m	120°	90.20 Lm/W	2700K (+/- 500K)	12 x 6 mm	200 mm

#### R&C AGENCY INTERNATIONAL

94 Wecker Road,  
Mansfield, QLD, 4122

Email: sales@rcagency.com.au  
Ph: (07) 3216 2888  
Fax: (07) 3216 2999

Opening Hour:  
8:00am to 4:30pm Monday to Friday  
\*Showroom by appointment only

**LEDSNA12 LEDSNA24**  
IP66 LED Snake Light



**GRC Lighting**

*R & C Agency International*  
*Lighting Specialists for over 15 years*

**Accessories to suit 12V & 24V DC Snake Light**

**LEDSNA12CHAN**



Description: 1m U type plastic channel  
Colour: Clear

**LEDSNA12CONF**



Description: Female connector  
Colour: Clear

**LEDSNA12CONM**



Description: Male connector  
Colour: Clear

**LEDSNA12END**




Description: Cutting end cap  
Colour: Clear

**LEDSNA12LCONN**




Description: L connect (1 male & 1 female connector)  
Colour: Clear

**LEDSNA12LIEND**



Description: Plastic end cap for aluminium linear profile  
Colour: Silver

**LEDSNA12LINEP**




Description: 1.5m Aluminium linear profile  
Colour: Silver

**LEDSNA12POWER**




Description: Male connector + moulded female connector

**LEDSNA12SADDLE**



Description: Saddle mounts with tie strip

**LEDSNA12STEP**



Description: 1.5m Aluminium step profile  
Colour: Silver

**LEDSNA12TCON**



Description: T connector (Protrusion on the right, male connector face down)

**LEDSNA12TPM**



Description: T connector (Protrusion on the bottom, male connector face down)

**LEDSNA12XCON**



Description: X connector (1 male & 3 female connectors)  
Colour: Silver

**LEDDIMMER**



Description: **IP20** 12V-24V DC Dimmer comes with remote controller. Max run 144W (24V) and 72W (12V)  
Size: 90mm x 90mm x 40(H) mm

**R&C AGENCY INTERNATIONAL**

94 Wecker Road,  
Mansfield, QLD, 4122

Email: sales@rcagency.com.au  
Ph: (07) 3216 2888  
Fax: (07) 3216 2999

Opening Hour:  
8:00am to 4:30pm Monday to Friday  
\*Showroom by appointment only