

Description:

This on/off DALI controlled switch is ideally suited for retrofit where non-dimmable LED drivers, transformer or fluorescent ballasts have been used. Saving costs on installation, components and wiring, this convertor is an extremely cost effective and environmentally sound solution for a lighting control upgrade.

Product Type: DALI switch


Mounting Type: Built-in box 60mm or stand alone installation

Operating Temperature: TA: -20 to +50°C



Item Code	Operating Voltage	Rated Load	Power Consumption	DALI Power	Size L x W x H
HDS2400	220-240VAC 50/60Hz	400W (capacitive load); 800W (resistive load)	≤ 0.5W	2mA	48.5 x 51 x 23 mm

## Wiring Diagram

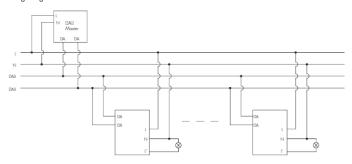

## **R&C AGENCY INTERNATIONAL**

94 Wecker Road, Mansfield, QLD, 4122

Email: sales@rcagency.com.au Ph: (07) 3216 2888 Fax: (07) 3216 2999

Opening Hour: 8:00am to 4:30pm Monday to Friday \*Showroom by appointment only